




Micro-D Connectors Small and Light Weight

 **Small Size & Light Weight**

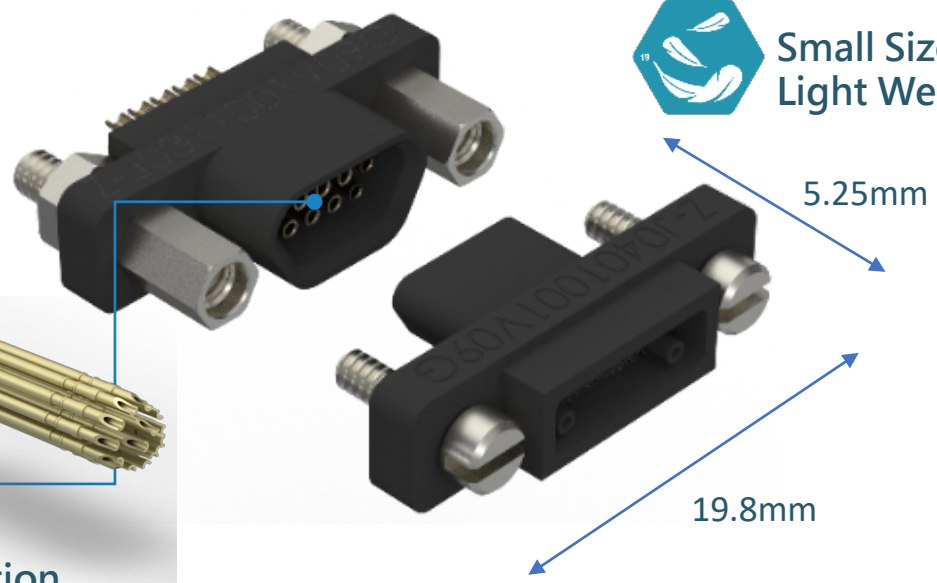


 **Anti-Vibration**

Features :

- Durability: 2,000 Cycles
- Current Rated: 3A
- DIM: 19.8mm * 5.25mm (L&W)
- N.W: 2.5g (Male) & 2.2g (Female)
- Feature MIL-DTL-83513 contacts spacing 0.050" (1.27mm)

Type :

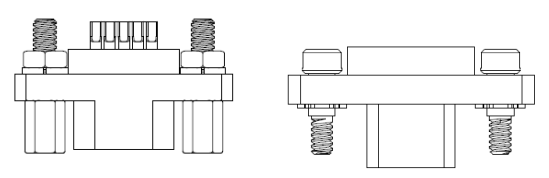

- Female: Cable Side (Solder Cup Terminal)
- Male: Cable Side (Crimp Pin)

Material	Electrical	Mechanical	Environmental
<ul style="list-style-type: none"> • Housing: LCP • Contact: Copper Alloy 	<ul style="list-style-type: none"> • Rated Current: 3A • Insulation Resistance: 5000 Megohms min 	<ul style="list-style-type: none"> • Durability: 2,000 cycles • Insertion and Extraction Forces: 85g per contact • Vibration : 20g • Wire: 28AWG 	<ul style="list-style-type: none"> • Salt Spray : 48H • Operating Temperature : -55°C to +125°C